

RECT. STRAIGHT DUCT W/ROUND TAP

DRAWN BY:




NOTES:
304L OR 316L Stainless Material w/2B Finish
All duct fittings include gasket & hardware for install
Fusion welds on all longitudinal seams
Halar Coated Interior Only
1/4" Gore-Tex Joint Sealant for the 4" thru 84" Angle Flanges
3/8" Gore-Tex Joint Sealant for the 86" thru 120" Angle Flanges
All angle frames stitch welded to duct per SMACNA Standards

[illegible]

SSTEELCOAT® RECTANGULAR DUCT ORDER SHEET

RECT. STRAIGHT DUCT W/ROUND TAP

USER:	
REP:	
JOB #:	
DATE:	SHEET of
DRAWN BY:	

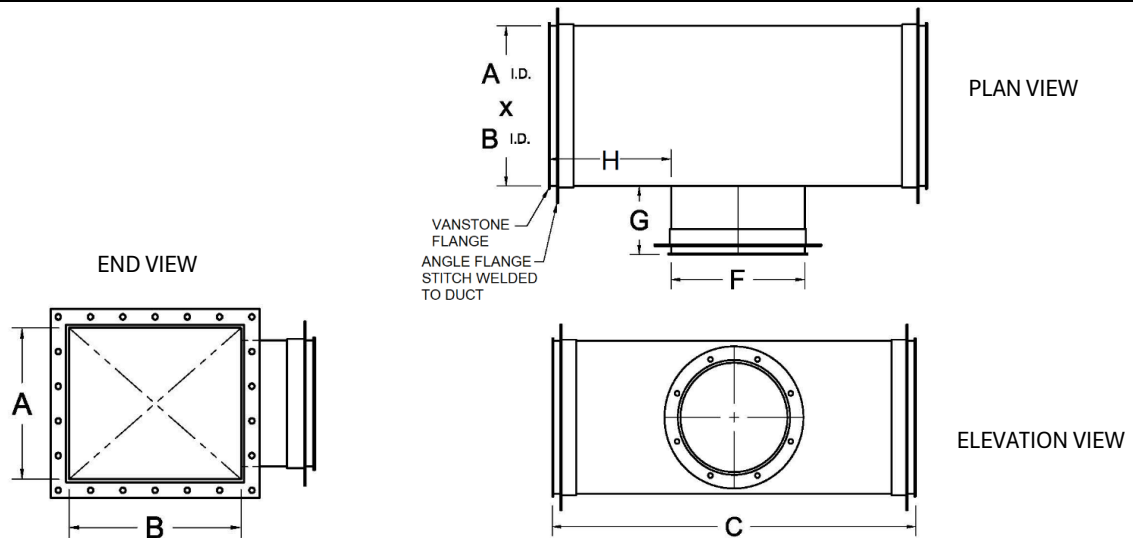

Static Pressure	
	(-6" W.G.)
	(-10" W.G.)
	(-15" W.G.)
	(-18" W.G.)

Material	
	304SS
	316SS
	DOMESTIC MAT.
	UN-COATED

Connection Types (A1 or A2)	
SS	304 Stainless Steel
RE	Raw End

Std. Dia. & Length: 4"Ø = 47.375"L
Std. Dia. & Length: 6"Ø - 16"Ø = 47"L
Std. Dia. & Length: 18"Ø - 84"Ø = 47"L & 95"L
Std. Dia. & Length: 86"Ø & Larger = 48.5"L & 96.5"L

NOTES:
304L OR 316L Stainless Material w/2B Finish
All duct fittings include gasket & hardware for install
Fusion welds on all longitudinal seams
Halar Coated Interior Only
1/4" Gore-Tex Joint Sealant for the 4" thru 84" Angle Flanges
3/8" Gore-Tex Joint Sealant for the 86" thru 120" Angle Flanges
All angle frames stitch welded to duct per SMACNA Standards

Part Number	QTY	DESCRIPTION								
		A	B	C	F	G	H	F	GA	NOTES/TAGS
								Orientation		



VIRON® INTERNATIONAL
505 Hintz Road Owosso, MI 48867


Phone: 989-723-8255
Toll Free: 800-248-4766

E-Mail: vironinfo@vironintl.com
Website: www.vironintl.com

SSTEELCOAT® RECTANGULAR DUCT ORDER SHEET

RECT. STRAIGHT DUCT W/RECT TAP

USER:	
REP:	
JOB #:	
DATE:	SHEET of
DRAWN BY:	

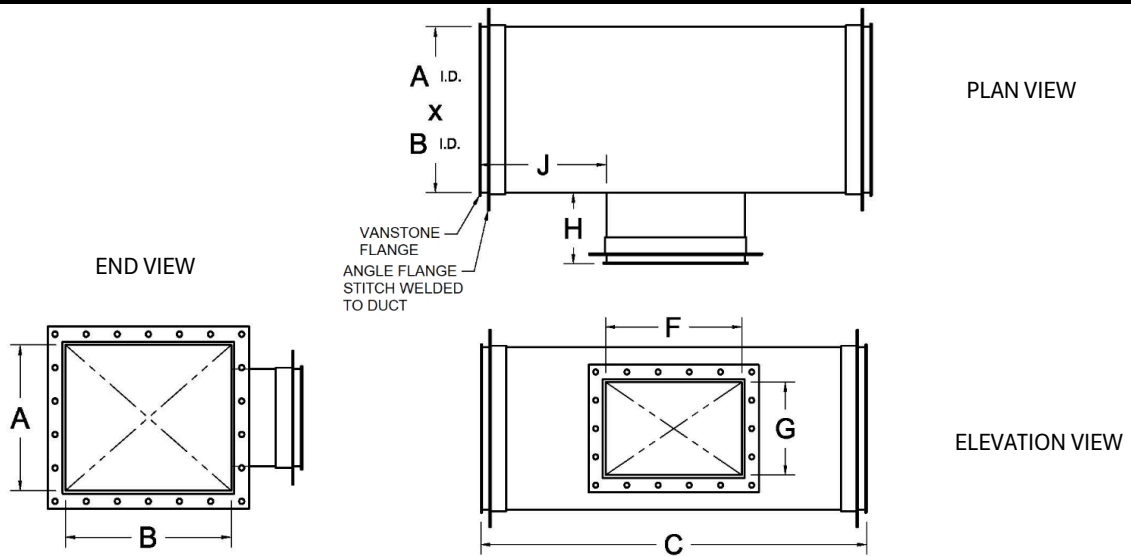

Static Pressure	
	(-6" W.G.)
	(-10" W.G.)
	(-15" W.G.)
	(-18" W.G.)

Material	
	304SS
	316SS
	DOMESTIC MAT.
	UN-COATED

Connection Types (A1 or A2)	
SS	304 Stainless Steel
RE	Raw End

Std. Dia. & Length: 4"Ø = 47.375"L
Std. Dia. & Length: 6"Ø - 16"Ø = 47"L
Std. Dia. & Length: 18"Ø - 84"Ø = 47"L & 95"L
Std. Dia. & Length: 86"Ø & Larger = 48.5"L & 96.5"L

NOTES:
304L OR 316L Stainless Material w/2B Finish
All duct fittings include gasket & hardware for install
Fusion welds on all longitudinal seams
Halar Coated Interior Only
1/4" Gore-Tex Joint Sealant for the 4" thru 84" Angle Flanges
3/8" Gore-Tex Joint Sealant for the 86" thru 120" Angle Flanges
All angle frames will be stitch welded to duct per SMACNA Standards

Part Number	QTY	DESCRIPTION								NOTES/TAGS
		A	B	C	F	G	H	J	GA	



VIRON® INTERNATIONAL
505 Hintz Road Owosso, MI 48867


Phone: 989-723-8255
Toll Free: 800-248-4766

E-Mail: vironinfo@vironintl.com
Website: www.vironintl.com

SSTEELCOAT® RECTANGULAR DUCT ORDER SHEET

RECT. STRAIGHT DUCT W/RECT BOOT

USER:	
REP:	
JOB #:	
DATE:	SHEET of
DRAWN BY:	

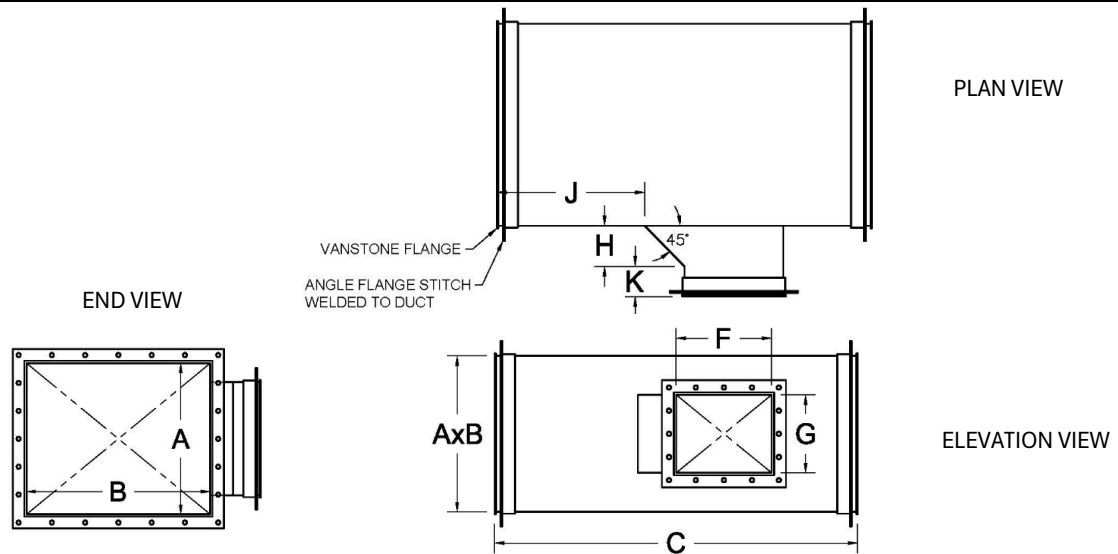

Static Pressure	
	(-6" W.G.)
	(-10" W.G.)
	(-15" W.G.)
	(-18" W.G.)

Material	
	304SS
	316SS
	DOMESTIC MAT.
	UN-COATED

Connection Types (A1 or A2)	
SS	304 Stainless Steel
RE	Raw End

Std. Dia. & Length: 4"Ø = 47.375"L
Std. Dia. & Length: 6"Ø -16"Ø = 47"L
Std. Dia. & Length: 18"Ø - 84"Ø = 47"L & 95"L
Std. Dia. & Length: 86"Ø & Larger = 48.5"L & 96.5"L

NOTES:
304L OR 316L Stainless Material w/2B Finish
All duct fittings include gasket & hardware for install
Fusion welds on all longitudinal seams
Halar Coated Interior Only
1/4" Gore-Tex Joint Sealant for the 4" thru 84" Angle Flanges
3/8" Gore-Tex Joint Sealant for the 86" thru 120" Angle Flanges
All angle frames to be stitch welded to duct per SMACNA Standards

Part Number	QTY	DESCRIPTION								NOTES/TAGS
		A	B	C	G	J	H	K	GA	



VIRON® INTERNATIONAL
505 Hintz Road Owosso, MI 48867

Phone: 989-723-8255
Toll Free: 800-248-4766

E-Mail: vironinfo@vironintl.com
Website: www.vironintl.com