


STRAIGHT DUCT W/TEST PORT / DRAIN

DRAWN BY:

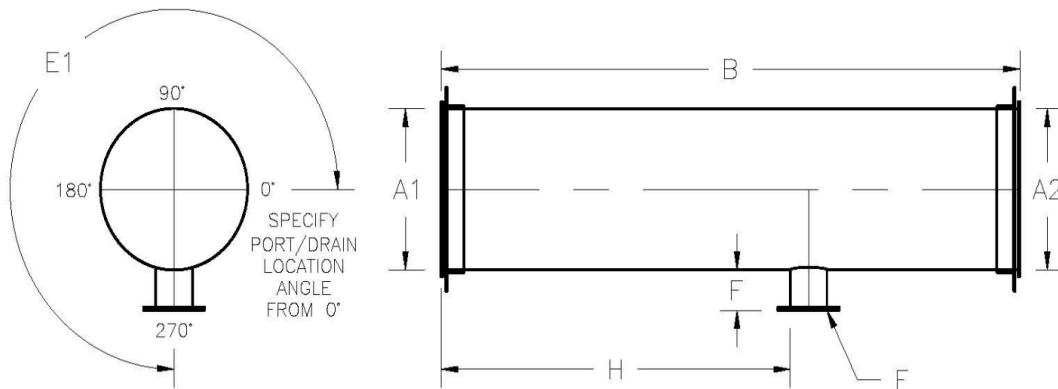

Static Pressure	
	(-6" W.G.)
	(-10" W.G.)
	(-15" W.G.)
	(-18" W.G.)

Material	
	304SS
	316SS
	DOMESTIC MAT.
	UN-COATED

Connection Types (A1 or A2)	
SS	304 Stainless Steel
QC	Quick Clamp + B/R (4" thru 16" ONLY)
150	ANSI 150# Flg
RE	Raw End

Std. Dia. & Length: 4"Ø = 47.375"L
Std. Dia. & Length: 6"Ø - 16"Ø = 47.25"L
Std. Dia. & Length: 18"Ø - 84"Ø = 47"L & 95"L
Std. Dia. & Length: 86"Ø & Larger = 48.5"L & 96.5"L

NOTES:
304L OR 316L Stainless Material w/2B Finish
All duct fittings include gasket & hardware for install
Fusion welds on all longitudinal seams
Halar Coated Interior Only
1/8" Gore-Tex Joint Sealant for the 4" thru 16" Quick Clamps
1/4" Gore-Tex Joint Sealant for the 4"Ø thru 84"Ø Angle Rings
3/8" Gore-Tex Joint Sealant for the 86"Ø thru 120"Ø Angle Rings
32"Ø & Larger Angle Rings to be Stitch Welded 1-HOLE TDC per SMACNA Stds


[illegible]

E-Mail: vironinfo@vironintl.com
Website: www.vironintl.com

SSSTEELCOAT® ROUND DUCT ORDER SHEET

STRAIGHT DUCT W/CONICAL TAP

USER:	
REP:	
JOB #:	
DATE:	SHEET of
DRAWN BY:	

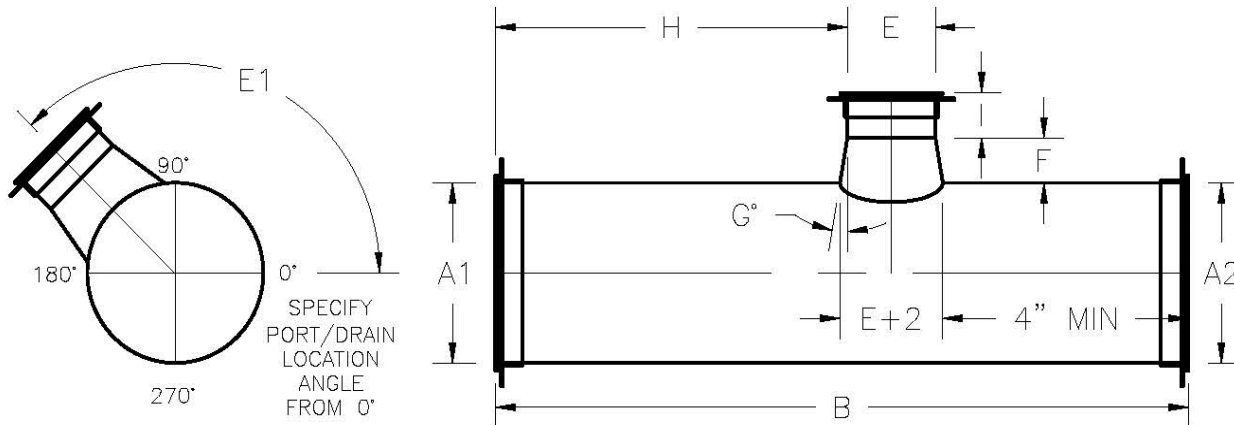

Static Pressure	
	(-6" W.G.)
	(-10" W.G.)
	(-15" W.G.)
	(-18" W.G.)

Material	
	304SS
	316SS
	DOMESTIC MAT.
	UN-COATED

Connection Types (A1 or A2)	
SS	304 Stainless Steel
QC	Quick Clamp (4" thru 16" ONLY)
150	ANSI 150# Flg
RE	Raw End

Std. Dia. & Length: 4"Ø = 47.375"L
Std. Dia. & Length: 6"Ø - 16"Ø = 47.25"L
Std. Dia. & Length: 18"Ø - 84"Ø = 47"L & 95"L
Std. Dia. & Length: 86"Ø & Larger = 48.5"L & 96.5"L

NOTES:
304L OR 316L Stainless Material w/2B Finish
All duct fittings include gasket & hardware for install
Fusion welds on all longitudinal seams
Halar Coated Interior Only
1/8" Gore-Tex Joint Sealant for the 4" thru 16" Quick Clamps
1/4" Gore-Tex Joint Sealant for the 4"Ø thru 84"Ø Angle Rings
3/8" Gore-Tex Joint Sealant for the 86"Ø thru 120"Ø Angle Rings
32"Ø & Larger Angle Rings to be Stitch Welded 1-HOLE TDC per SMACNA Stds

Part Number	QTY	DESCRIPTION										GA
		A1	B	E	H	F	I	A1	A2	E	E1	
		Duct Ø	Length	Duct Ø	Location	Length	Length	Ring Type	Ring Type	Ring Type	Orientation	



VIRON® INTERNATIONAL
505 Hintz Road Owosso, MI 48867

Phone: 989-723-8255
Toll Free: 800-248-4766

E-Mail: vironinfo@vironintl.com
Website: www.vironintl.com

STRAIGHT DUCT W/SHOE TYPE TAP


DRAWN BY:

[illegible]

SSSTEELCOAT® ROUND DUCT ORDER SHEET

STRAIGHT DUCT W/LATERAL TAP

USER:	
REP:	
JOB #:	
DATE:	SHEET of
DRAWN BY:	

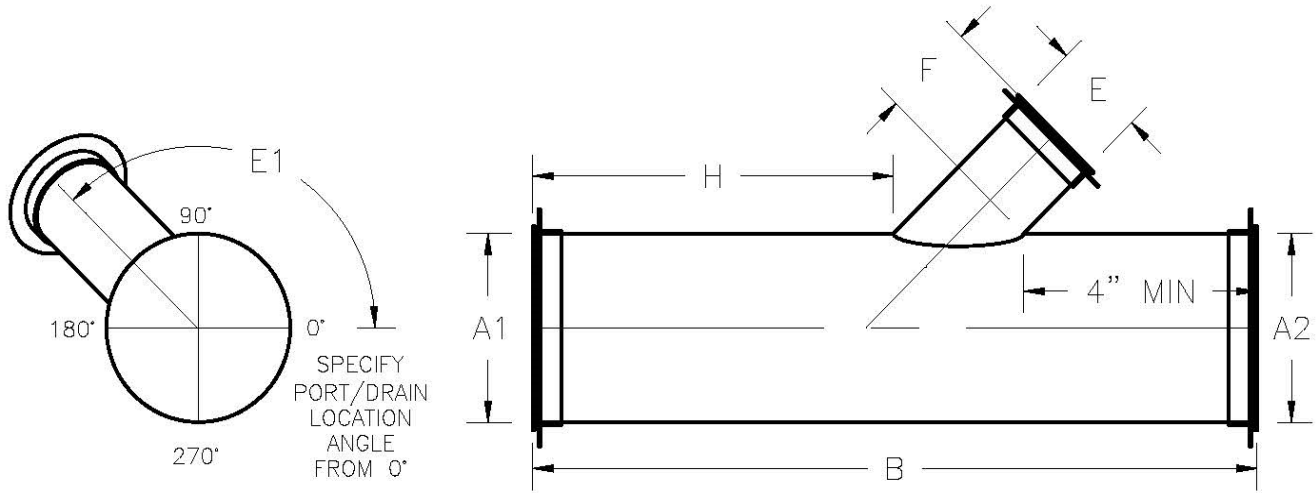

Static Pressure	
	(-6" W.G.)
	(-10" W.G.)
	(-15" W.G.)
	(-18" W.G.)

Material	
	304SS
	316SS
	DOMESTIC MAT.
	UN-COATED

Connection Types (A1 or A2)	
SS	304 Stainless Steel
QC	Quick Clamp (4" thru 16" ONLY)
150	ANSI 150# Flg
RE	Raw End

Std. Dia. & Length: 4"Ø = 47.375"L
Std. Dia. & Length: 6"Ø - 16"Ø = 47.25"L
Std. Dia. & Length: 18"Ø - 84"Ø = 47"L & 95"L
Std. Dia. & Length: 86"Ø & Larger = 48.5"L & 96.5"L

NOTES:
304L OR 316L Stainless Material w/2B Finish
All duct fittings include gasket & hardware for install
Fusion welds on all longitudinal seams
Halar Coated Interior Only
1/8" Gore-Tex Joint Sealant for the 4" thru 16" Quick Clamps
1/4" Gore-Tex Joint Sealant for the 4"Ø thru 84"Ø Angle Rings
3/8" Gore-Tex Joint Sealant for the 86"Ø thru 120"Ø Angle Rings
32"Ø & Larger Angle Rings to be Stitch Welded 1-HOLE TDC per SMACNA Stds

Part Number	QTY	DESCRIPTION										
		A1	B	E	H	F	A1	A2	E	E1	GA	NOTES
		Duct Ø	Length	Duct Ø	Location	Length	Ring Type	Ring Type	Ring Type	Orientation		



VIRON® INTERNATIONAL
505 Hintz Road Owosso, MI 48867

Phone: 989-723-8255
Toll Free: 800-248-4766

E-Mail: vironinfo@vironintl.com
Website: www.vironintl.com